


# P-9910B

## DC9000 / Di9000 Series hand held device programmer

### General

---

The P-9910B is the tool for programming and configuration of GST addressable and conventional detectors and devices. It can be used to read parameters and set the operating mode and sensitivities of these devices.

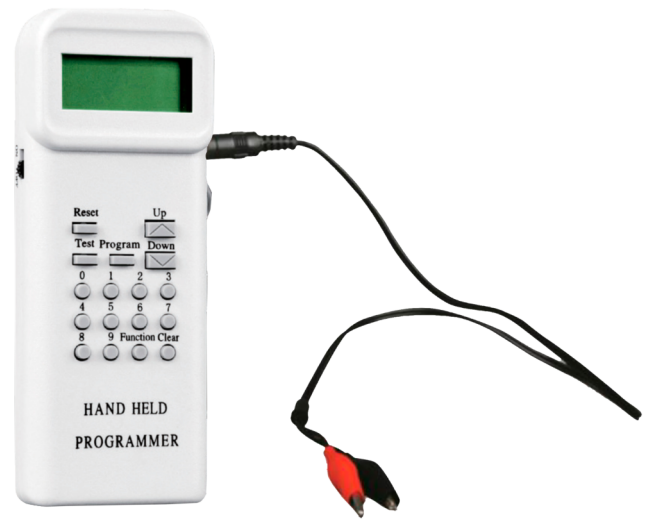

### Details

---

- Hand held & portable
- Easy operation
- 4-digit alphanumeric LCD display
- Low-consumption, hibernation and power saving functions extends the operating time
- Battery low indication

# P-9910B

## DC9000 / Di9000 Series hand held device programmer

### Technical specifications

---

#### General

Status indication	LCD display
User interface	LCD display
Compatibility	GST DC-9000E Detectors
Connectivity	I2C & fly leads with clips

#### Electrical

Batteries	1 x 9 V (Laminated)
Current consumption	≤100 µA (Standby) ≤8 mA (Operating)

#### Physical

Colour	White
Mounting type	Accessory
Material (body)	Plastic

#### Environmental

Vandal proof	No
Operating temperature	-10 to +50°C
Relative humidity	≤95%, Non-condensing
Environment	Indoor

#### Regulatory

Compliance	RoHS, WEEE
Certification	UL



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [ie.firesecurityproducts.com](http://ie.firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 10:31