

# 1-B6782-170

## Retractable Cable, Coiled, Length 30m

### General

---

Retractable cables are designed to provide electrical connection for parts that are in motion after connection e.g. a tank roof top of floating roof tanks. They reduce the risk present in normal cables of being caught and snapped during the rising and falling movement of the tank roof.

The 1-B6782-170 is a coiled, retractable, 4-core cable of 30m in working length.

### Accessories

---

For ease of installation, retractable cables may be used with an optional retractable cable collector, the 1-B6782-032.



### Details

---

- Simplifies electrical connections of floating roof tanks
- Reduces cable damage in moving installations

# 1-B6782-170

## Retractable Cable, Coiled, Length 30m

### Technical specifications

#### Physical

Physical dimensions	0.75 mm <sup>2</sup>
Colour	Blue

#### Environmental

Environment	Indoor, Outdoor
-------------	-----------------

#### Cores

Number	4
Colours	Blue, brown, black, yellow
Size	0.75 mm <sup>2</sup>
Diameter	1.75 mm
Insulation	PVC
Sheath	Polyurethane

#### Cable

Colour	Black
Diameter	10 mm (± 0.25)
Sheath	Hytrel™ (Dupont)
Tails D/E*	1.5 m (± 50) 5.5m (± 100)
Working length (incl. tails)	30 m
Temperature	-40°C to +80°C

#### Coil


Outer diameter (nom.)	250 mm
A*	
Closed length B*	580 mm (± 50)

#### Manufacturing standards

Cores	ISO 6722 Thin Wall
-------	--------------------

\*

(See image below)

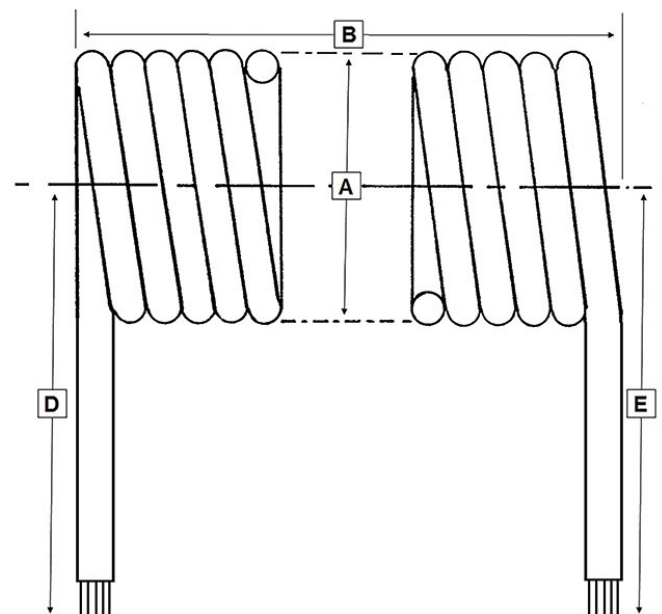

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.