



1-B6782-190

EExe GRP Junction Box for Tank Roof

General

The 1-B6782-190 is a FLP junction box for installation on tank roofs. It is supplied with three M20 cable glands, and allows for electrical connection between the retractable cable and the linear heat detection (LHD) cable.

Application (LHD)

One significant application for linear heat sensor cable is floating roof storage tanks. As installation in this application provides significant challenges, the 1-B6782-190 junction box helps to simplify the installation.

On a floating roof tank the roof itself is designed to move up and down as the tank is filled or emptied, preventing any vapour space in the tank. The difficulty is maintaining an electrical connection between the top of the tank and the moving tank roof.

This junction box is installed on the tank roof allowing termination of the sensor cable which runs around the rim seal of the floating roof. Three cable glands are provided which allow electrical connection from the junction box on the tank top as well as termination of both ends of the sensor cable.



Details

- Increased safety Exe Dual Certified
- Flame retardant to IEC 92.1 Clause 2.38
- High ingress protection rating
- Suitable for use in Zone 1, 2, 21 and 22 applications
- Supports M20 cable glands
- Supplied with: - 3 x Exd IP66 rated brass cable glands (M20) - 2 x Fibre washers - 3 x Lock nuts (M20) - 4 x Exd cable connectors - 1 x Exd earth connector

1-B6782-190

EExe GRP Junction Box for Tank Roof

Technical specifications

Physical

Physical dimensions	120 x 120 x 74 mm (W x H x D)
Net weight	800 g
Colour	Black
Cable entries	3 x M20
Material	Glass Reinforced Polyester

Environmental


Operating temperature	-60 to +75°C
Environment	Indoor, Outdoor, Exd
IP rating	IP66/IP67 to IEC/EN 60529
IP rating	IP66 and IP67 to IEC/EN 60529
Deluge protection	DTS01
Operating temperature	-60 to +75°C
Temperature class / ambient	T6 40°C

Mechanical

Dimensions (w x h x d)	120 x 120 x 73.5 mm
Fixing holes	4 x 7 mm @ 102 mm ² CRS
Weight	0.8 kg
Material	Glass Reinforced Polyester
Colour	Black
Cable entry points	3 x M20
Cable size (outer sheath dia)	2 x 3.2 to 8mm 1 x 10 to 14.3mm
Terminals	4 x 2.5mm 1 x 4mm

Approvals

Baseefa06ATEX0117X
IECEX BAS 06.0028X

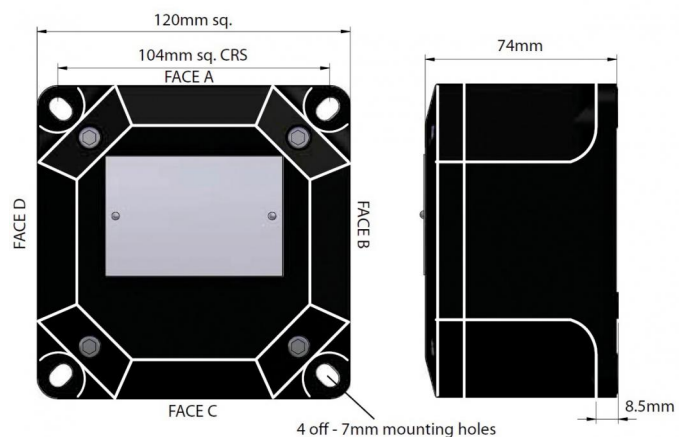

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

30 April 2019 - 10:40



United Technologies

Climate | Controls | Security