

Ceiling-mounted Loudspeakers

EST-S206B

- Compliance with EN 54-24
- Certificate of Conformity: 1438-CPR-0634
- Compliance with BS5839-8 standard (Thermal protection)



OVERVIEW

Ceiling mounted fire alarm EST-S206B loudspeaker is designed for operations at high acoustic levels and the highest reduction in power supply. Actual wide band high efficiency ensures the best understanding of verbal messages. Its parameters have been carefully selected to comply with suspended ceiling applications, both at standard and considerably elevated ceiling-to-floor distance.

Thanks to the most advanced technologies EST-S206B loudspeaker combines excellent acoustic parameters and high aesthetics with resistance to mechanical damages. It is distinguished by easy and quick installation.

Quality standards and audio characteristics have been confirmed through tests and trials in an anechoic chamber, resistance and integrity testing equipment, as well as chambers for resistance to weather and air humidity testing.

The EST-S206B loudspeaker ensure a balanced sound which is extremely important in emission of highly understandable speech.

The EST-S206B loudspeaker is noticeable thanks to its elegant looks. The loudspeaker part which becomes visible after the installation is covered by a common and aesthetic white paint coat (RAL 9003) – optionally available other colours (RAL palette).

EST-S206B is equipped with a standardized fire dome made of soft steel and supplied with two cable penetrations with rubber glands. Special jig for sling assembling facilitates quick installation. Ceramic blocks and fireproof wiring coupled with temperature limit fuse are located inside fire dome.

Standard Features

- The highest level of speech intelligibility
- Elegant looks
- 6 W transformer allowing a precise selection of loudspeaker output power
- 100% protection of line from breaks and short-circuits

The individual power rating is selected by means of connection with applicable transformer branch.

EST-S206B loudspeaker equipped with fire dome and thermal protections entirely comply with EN 54-24 Standards. In order to ensure 100% consistency with the highest quality standards we test our loudspeaker following the most meticulous procedures that warrant high parameters of sound emission, safety, and reliability.

In spite of the fact our loudspeaker is designed for the highest reliability under fire conditions, their acoustic parameters and attractive low prices make them successful in any and all public address systems.

Electrical

Rated power, W	6
Tappings 100 V line according to EN 54-24, W	6 / 3 / 1,5 / 0,75
Tappings 70 V line, W	3 / 1,5 / 0,75 / 0,37
Transformer impedance, Ω	1667/3333/ 6667/13333
Driver impedance, Ω	8
Effective frequency range, Hz	120–20 000
Sensitivity @ 4 m, 1 W, dB	81
SPL @ 4 m, Rated power, dB	88
SPL @ 1 m, 1 W, dB, Test signal bandwidth 300 Hz–6 kHz	93
SPL @ 1 m, Rated power, dB, Test signal bandwidth 300 Hz–6 kHz	101
Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	180 / 180 / 95 / 70

Environmental

Environmental type / IP Rating according to EN 54-24	A / IP21C
IP Rating	32C
Min/Max Amb Temp	-10°C / 55°C


Mechanical

Dimensions, mm	Height 115, ϕ 199
Net Weight, kg	1,13
Colour	White (RAL 9003)
Material	Steel
Mounting	Spring clamp
Cut-out, mm	ϕ 175

Option

For DC line monitoring	–
Colour optional	RAL Palette

Frequency band:

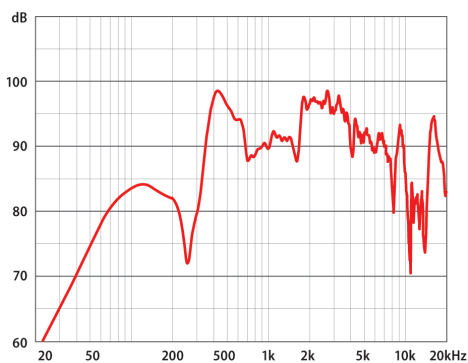

Circular chart of directional characteristic:

